


SEMI-RESTRICTIVE COUNTERBALANCE 4.5:1

半限流 抗衡閥4.5:1

CB-D

Technical Data

技術參數



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)			Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c			
CB2D	T11A	40	34.9	22.2	50	40/50	0.17	350
CB3D	T2A	80	34.9	28.6	61	60/70	0.30	350
CB6D	T17A	160	46.0	31.8	70	200/215	0.64	350

Ordering Code

型號說明

CB 1 2D 2 T11A 3 L 4 K 5 N 6

1 Model Code 產品型號

2 Capacity (l/min) 流量

2: 40 3: 80 6: 160

3 Pilot Ratio 導壓比

D: 4.5:1

4 Cavity 閥孔型號

T11A T2A T17A

5 Control 控制方式

L: standard screw adjustment 標準螺絲調整

6 Functional Setting Range 設定範圍


Code 編號	J	K	C	D
Adjustment range (bar) 調壓範圍	140~350	70~175	140~350	70~175
Check (bar) 止回彈簧壓力	1.7	1.7	0.3	0.3
Standard setting (bar) 出廠設定壓力	210	140	210	140

7 Seal 油封材質

N: buna-N V: viton

Turn screw clockwise to reduce
setting and release load
順時針方向旋轉;降壓
逆時針方向旋轉;增壓

Full Adjustment
3 turns
全調三圈

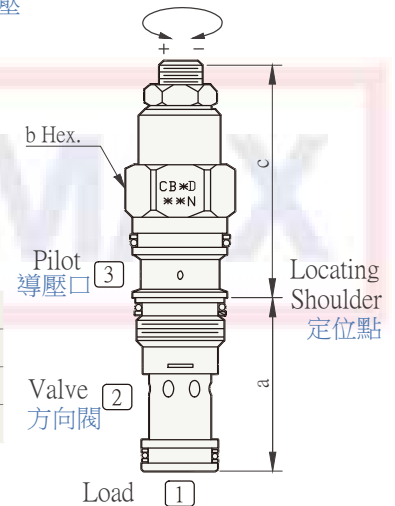

Performance Curves

性能曲線

