

VENTED COUNTERBALANCE


透氣型 四口 抗衡閥

CW-*

Technical Data

技術參數

Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)			Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c			
CW2*	T21A	60	34.9	22.2	74.0	45/50	0.19	350
CW3*	T22A	120	34.9	28.6	84.0	60/70	0.36	350
CW6*	T23A	240	46.0	31.8	95.3	200/215	0.72	350
CW8*	T24A	480	63.5	41.3	117.0	465/500	1.60	350



Ordering Code

型號說明

CW 1 2A 2 T11A 3 L 4 H 5 N 6

- Model Code 產品型號
- Capacity (l/min) 流量
2: 60 3: 120 6: 240 8: 480

- Pilot Ratio 導壓比

A: 3:1 G: 5:1

- Cavity 閥孔型號

T21A T22A T23A T24A

- Control 控制方式

L: standard screw adjustment 標準螺絲調整

- Functional Setting Range 設定範圍

Pilot Ratio 導壓比

Code 編號

Adjustment range (bar) 調壓範圍


Standard setting (bar) 出廠設定壓力

Seal 油封材質

N: buna-N V: viton

Turn screw clockwise to reduce setting and release load
順時針方向旋轉: 降壓
逆時針方向旋轉: 增壓

Full Adjustment 4 turns 全調四圈

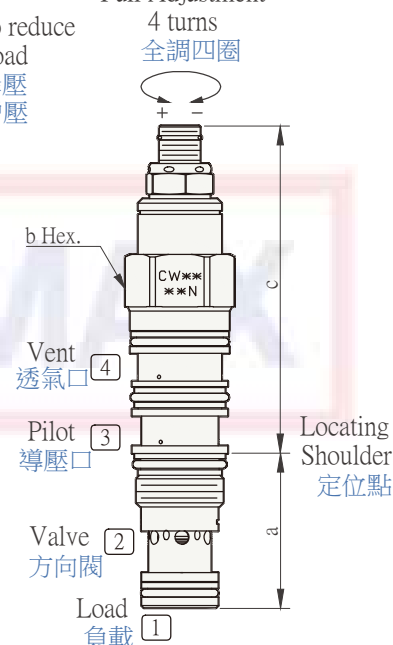

Performance Curves

性能曲線

