


PILOT-TO-OPEN CHECK

導壓開單向閥

CK-*

Technical Data

技術參數




Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					X	L			
CK2*	T11A	60	34.9	22.2	31	64	40/50	0.13	350
CK3*	T2A	120	34.9	28.6	35	72	60/70	0.24	350
CK6*	T17A	240	46.0	31.8	46	84	200/215	0.53	350
CK8*	T19A	480	63.5	41.3	59	100	465/500	1.16	350

Ordering Code

型號說明

CK **1** **2B** **2** **T11A** **3** **X** **4** **C** **5** **N** **6**

- Model Code 產品型號
- Capacity (l/min) 流量
2: 60 3: 120 6: 240 8: 480
- Pilot Version 導壓型式
B: bleed through pilot 標準型
D: sealed pilot 導壓室密封
- Cavity 閥孔型號
T11A T2A T17A T19A
- Control 控制方式
X: standard pilot 標準導壓
L: manual load release 手動導壓
- Cracking Pressure (bar) 開閥壓力
A: 0.3 C: 2.0 E: 5.0
- Seal 油封材質
N: buna-N V: viton

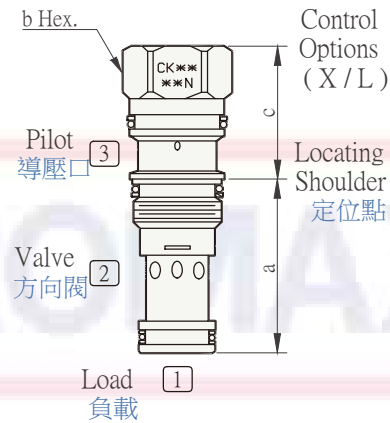
Pilot Ratio 導壓比
3 : 1

Performance Curves

性能曲線

