

# FULLY ADJUSTABLE NEEDLE WITH FREE FLOW CHECK


全調型節流閥 附單向閥



NC-B

## Technical Data

## 技術參數



| Model<br>Code<br>產品型號 | Cavity<br>閥孔型號 | Capacity<br>流量<br>( l/min ) | Dimension 尺寸<br>( mm ) |      |    |    | Torque<br>安裝扭力<br>( Nm ) | Weight<br>重量<br>( kg ) | Max.<br>Pressure<br>最大壓力<br>( bar ) |
|-----------------------|----------------|-----------------------------|------------------------|------|----|----|--------------------------|------------------------|-------------------------------------|
|                       |                |                             | a                      | b    | c  |    |                          |                        |                                     |
|                       |                |                             |                        |      | L  | K  |                          |                        |                                     |
| NC2B                  | T13A           | 25                          | 34.9                   | 22.2 | 58 | 64 | 40/50                    | 0.14                   | 350                                 |
| NC3B                  | T5A            | 50                          | 41.1                   | 28.6 | 67 | 73 | 60/70                    | 0.26                   | 350                                 |
| NC6B                  | T16A           | 100                         | 61.9                   | 31.8 | 73 | 79 | 200/215                  | 0.58                   | 350                                 |
| NC8B                  | T18A           | 200                         | 79.4                   | 41.3 | 84 | 90 | 465/500                  | 1.23                   | 350                                 |

## Ordering Code

## 型號說明

NC 1 2B 2 T13A 3 L 4 C 5 N 6

1 Model Code 產品型號

2 Capacity (l/min) 流量  
2: 25 3: 50 6: 100 8: 200

3 Cavity & Maximum Orifice 閥孔型號與最大節流孔

| T13A  | T5A   | T16A  | T18A   |
|-------|-------|-------|--------|
| 4.8mm | 6.3mm | 9.6mm | 14.2mm |

4 Control 控制方式

L: standard screw adjustment 標準螺絲調整  
K: handknob with lock knob 調鈕調整


5 Cracking Pressure (bar) 開閥壓力

A: 0.3 C: 2.0 E: 5.0

6 Seal 油封材質

N: buna-N V: viton

Full Adjustment  
5 turns  
全調五圈

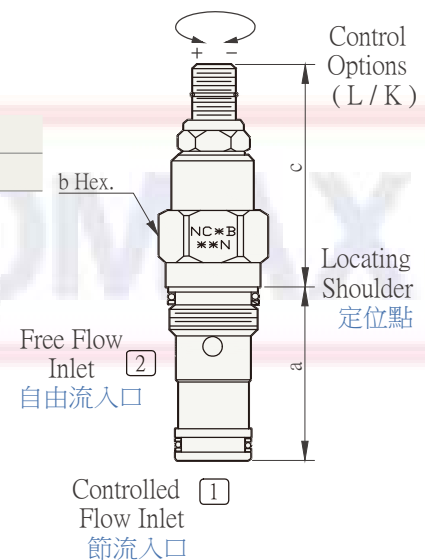

## Performance Curves

## 性能曲線

