


VENTABLE, PILOT OPERATED RELIEF 透氣口控制 平衡式溢流閥

RV-A

Technical Data

技術參數



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					L	K			
RV2A	T11A	60	34.9	22.2	64	70	40/50	0.17	350
RV3A	T2A	120	34.9	28.6	72	78	60/70	0.30	350
RV6A	T17A	240	46.0	31.8	84	90	200/215	0.64	350
RV8A	T19A	480	63.5	41.3	100	107	465/500	1.43	350


Ordering Code

型號說明

RV 1 2A 2 T11A 3 L 4 A 5 N 6

- Model Code 產品型號
- Capacity (l/min) 流量
2: 60 3: 120 6: 240 8: 480
- Cavity 閥孔型號
T11A T2A T17A T19A
- Control 控制方式
L: standard screw adjustment 標準螺絲調整
K: handknob with lock knob 調鈕調整
- Adjustment Range (bar) 調壓範圍
A: 7~210 B: 3.5~105 C: 10.5~420 N: 5~55
- Seal 油封材質
N: buna-N V: viton

Full Adjustment
5 turns
全調五圈

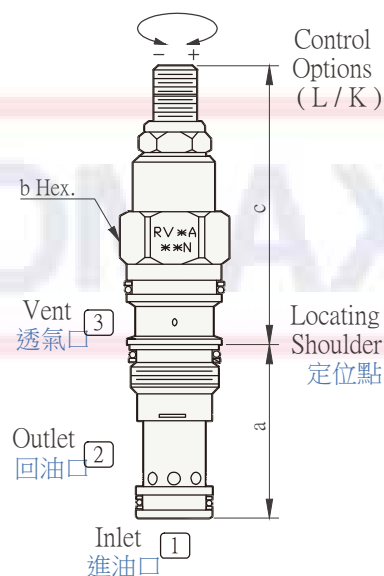

Performance Curves

性能曲線

