


DIRECT ACTING PRESSURE REDUCING / RELIEVING 直動式減洩壓閥



PR-B

Technical Data

技術參數



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					L	K			
PR2B	T11A	40	34.9	22.2	79	85	40/50	0.20	350
PR3B	T2A	80	34.9	28.6	89	96	60/70	0.36	350
PR6B	T17A	160	46.0	31.8	100	107	200/215	0.76	350
PR8B	T19A	320	63.5	41.3	124	130	465/500	1.58	350


Ordering Code

型號說明

PR 1 2B 2 T11A 3 L 4 A 5 N 6

- Model Code 產品型號
- Capacity (l/min) 流量
2: 40 3: 80 6: 160 8: 320
- Cavity 閥孔型號
T11A T2A T17A T19A
- Control 控制方式
L: standard screw adjustment 標準螺絲調整
K: handknob with lock knob 調鈕調整
- Adjustment Range (bar) 調壓範圍
A: 35~210 B: 3.5~105 D: 14~55 W: 50~315
- Seal 油封材質
N: buna-N V: viton

Full Adjustment
5 turns
全調五圈

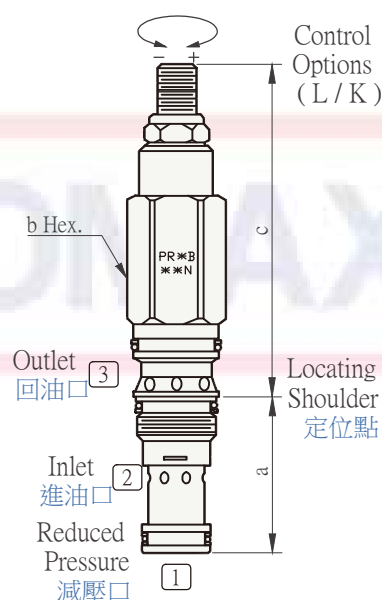

Performance Curves

性能曲線

