


Graphic Symbol

繪圖符號

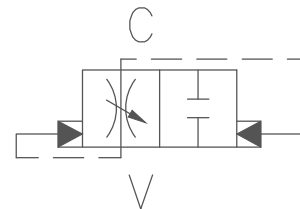

Ordering Code

型號說明

VF-30 **1**

1

Pressure setting
壓力調整選項

VF-30
VF-80
VF-120
VF-160

Technical Data

技術參數

Max.Operating Pressure 最高壓力	Rated Flow 額定流量	Weight 重量
bar(psi)	(l /min)	(kg)
210(2940)	VF-30→30 VF-80→60 VF-120→90 VF-160→250	VF-30→0.2 VF-80→0.3 VF-120→0.5 VF-160→0.8

Function : Under normal operating conditions, this valve is normally open. When the system flow going through this valve has a sudden increase over the preset flow velocity level due to system failure, hose burst, or over-load, this valve will shut off automatically to provide safety for operators.


Features : 1. The desired flow rate is adjustable and can be preset.
2. Compact design provides ease for installation. If C port is mounted directly to t cylinder, the result is even better.

Dimension


外型尺寸圖

Millimeters /(inch)

(VF-30)

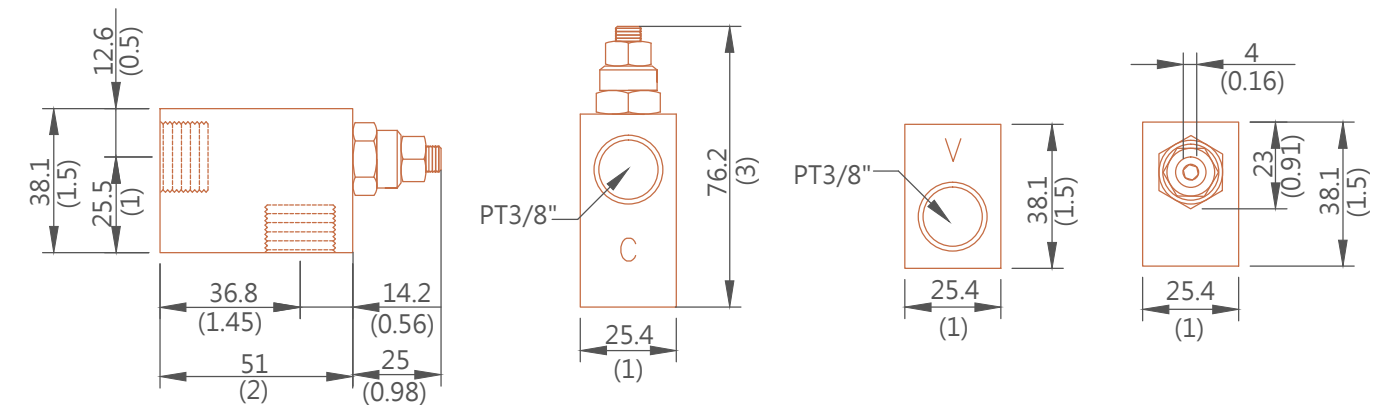

(VF-160)

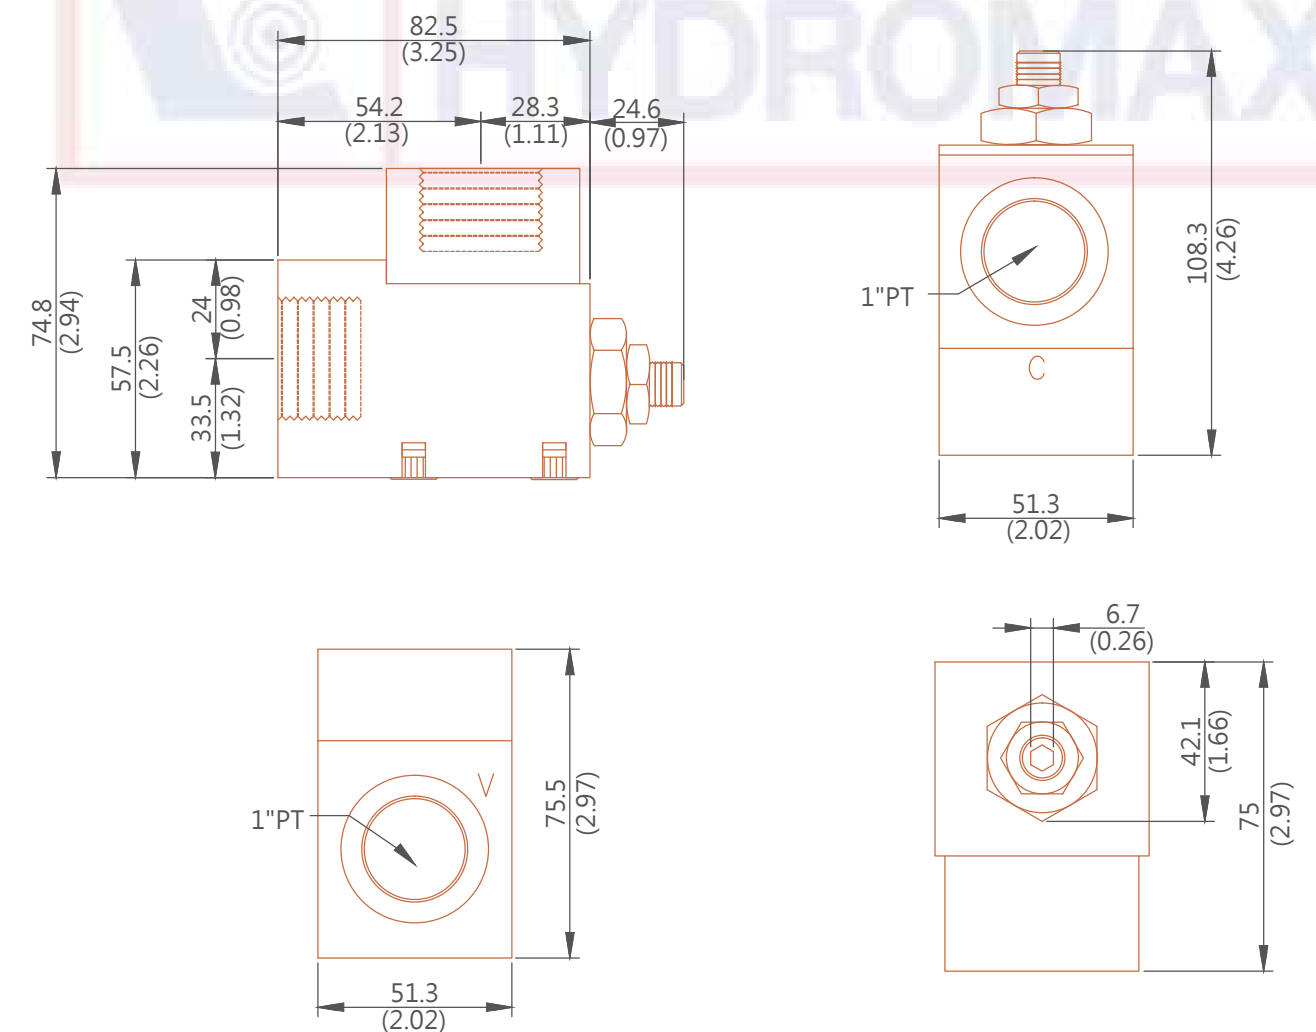

VALVE FITTING 閥類配件


VF-30/80/120/160 (HOSE BURST PROTECTION VALVE)

Dimension

外型尺寸圖

Millimeters /(inch)

(VF-120)

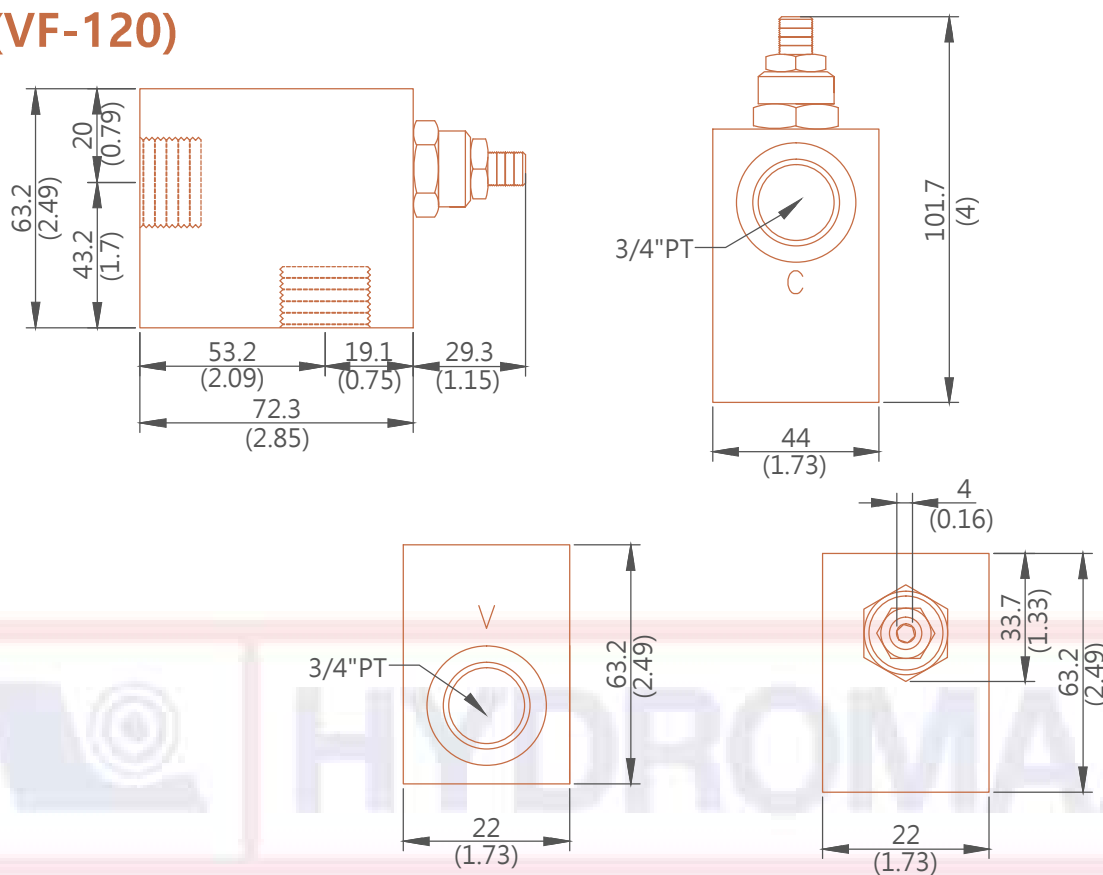

(VF-80)

