

CARTRIDGE SOLENOID CHECK VALVE


插入式電磁止回閥

V3280/V3380-T03 (HSV10)



Graphic Symbol

繪圖符號



Ordering Code

型號說明

V3280 V3380 1 T03 2 @ 3 # 4 * 5 D24 6 DG 7 25 8

1

Cartridge solenoid check valve
插入式電磁止回閥

V3280/V3380(10W-2)

二口二位

Poppet 2-way


2

Manifold type
油路塊總類選項

T03:3分管式安裝

3

Operation
油路方向功能選項

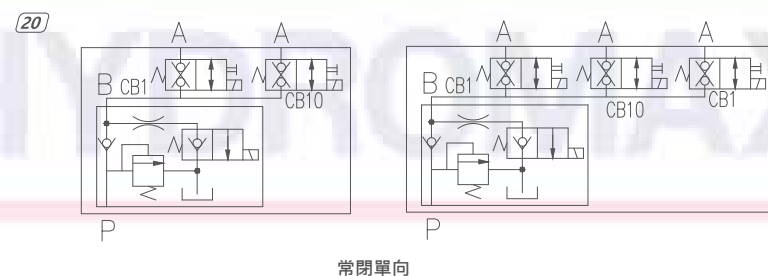

4

Option:
with filter
附濾網裝置選項

S: With Filter
有濾網

N: Without Filter
無濾網

5

Option:
with manual
附手動輔助裝置選項

P: Push-style Manual Override
P: 推 (向外推移式)

N: Option
N: 標準 (輔助裝置不可調)

M: Screw-out Konb Style
M: 旋鈕式 (開) 逆時鐘方向 ↺

Screw-in Konb Style
旋鈕式 (開) 順時鐘方向 ↻

T: Push and Twist Style
T: 推桿附扭轉

Manual Override
固定輔助裝置

6

Coil type
線圈型式

D12: DC12V
A22: AC220V

D24: DC24V
A38: AC380V

A24: AC24V
RA1: RAC220V

A11: AC110V
RA2: RAC220V

7

Terminations
接線方式

DG: DIN43650
插頭式

DL: Lead wires(2)
出線2條式

8

Max pressure
最高壓力

25: 250bar(3500psi)

Technical Data



技術參數

Max. Operating Pressure 最高壓力	Rated Flow 額定流量	Cavity Tooling 成型孔	Installation Torque 安裝扭矩	Weight 重量
bar(psi)	(l/min)		(Nm)	(kg)
250(3500)	38	10W-2	44-56	4 (3280) 5.08(3380)

Fluids-Temperatures 使用油溫範圍	Internal Leakage 最大內漏量	Filtration 過濾精度	Minimun Voltage Required 線圈需要的最低電壓
(°C)	0.25cc/minute	(um)	
-40~120°C	(5 drops/minute) max. at 250 bar (5滴/每分) 壓降250bar時	25	90% of nominal 額定電壓的90%

Specifications



技術數據

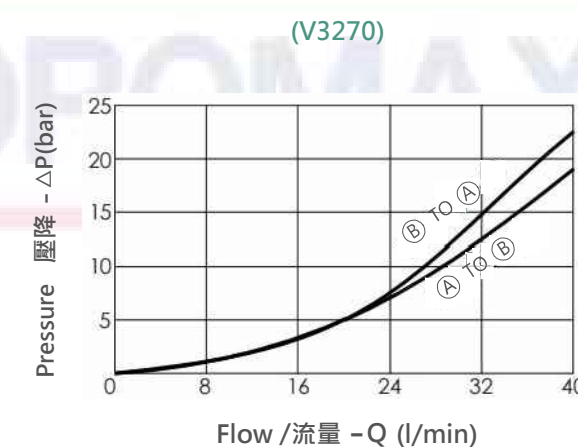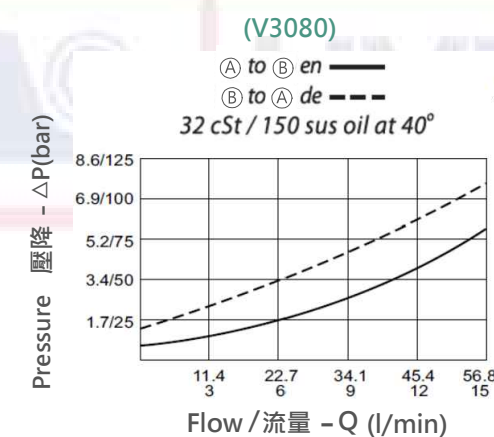

Cavity Tooling

成型孔

Millimeters (m/m)

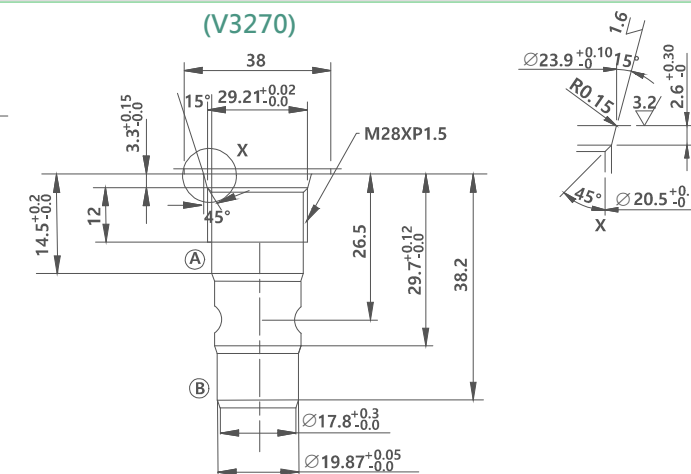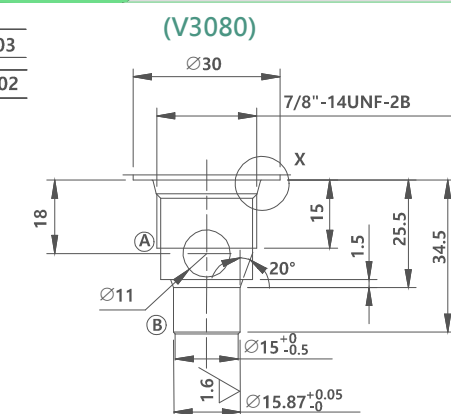

CARTRIDGE SOLENOID CHECK VALVE



插入式電磁止回閥

V3280/V3380-T03 (HSV10)

Dimension

外型尺寸圖

Millimeters/(inch)

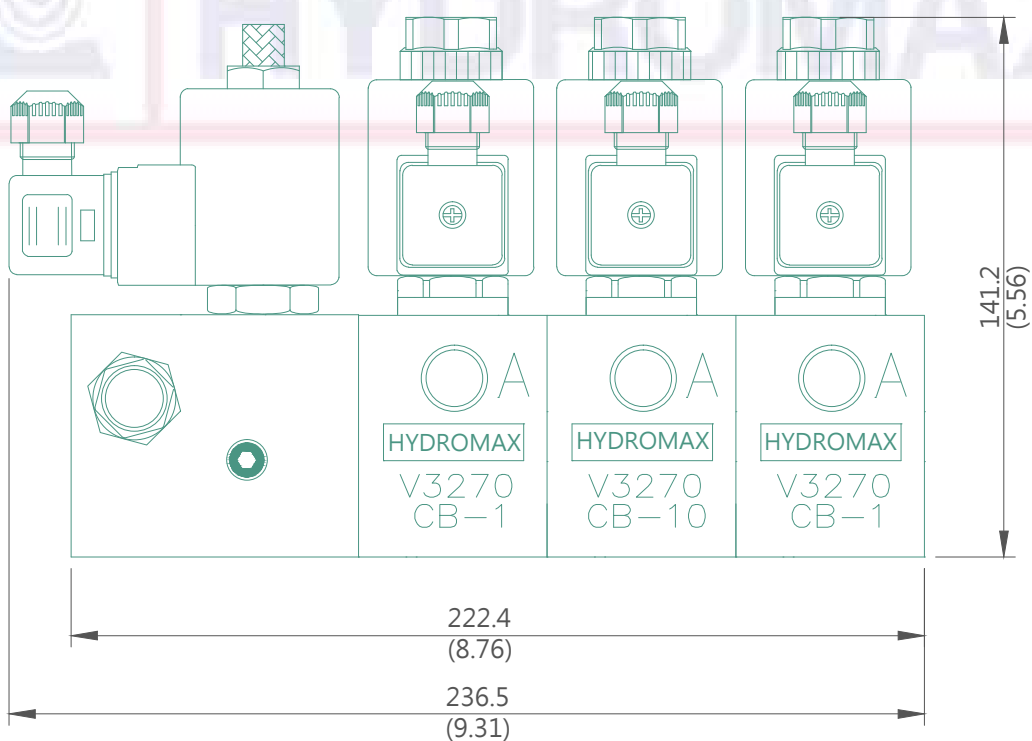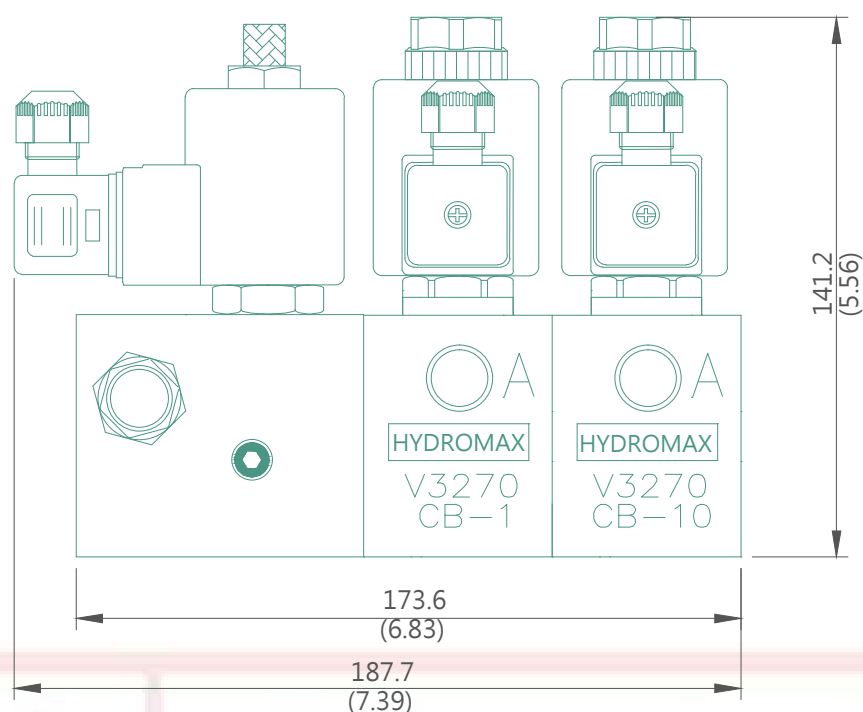

P138~P140、P144~P149

for detail dimension