


Description

描述

A screw-in, cartridge-style, direct-acting, poppet-type, hydraulic relief valve intended for lower flow circuits requiring low internal leakage.

Graphic Symbol

繪圖符號



Ordering Code

型號說明

HRAV 1 08 2 A 3 N 4

1 Series Number
系列編號

HRAV

2 Valve Size 閥規格

08 : 22.7 lpm/6 gpm
10 : 38 lpm/10 gpm

3 Option: Highest pressure
最高壓力選項

A : 70 kg/cm² C : 210 kg/cm²
B : 140 kg/cm² D : 280 kg/cm²

4 Option: with knob 附把手裝置選項

N: Without knob K: With knob
無把手 有把手

Technical Data


技術參數

	Operating Pressure 操作壓力	Flow 流量	Internal Leakage 內泄量	User Temperature 使用溫度	Weight 重量
	bar(psi)		(cc/min)	(°C)	(kg)
HRVA-08	250(3500)	22.7 lpm/6 gpm	0.25 cc/min	-40~100°C	0.08
HRVA-10	250(3500)	38 lpm/10 gpm	0.25 cc/min	-40~100°C	0.12

Specifications


技術數據

(HRVA-08)

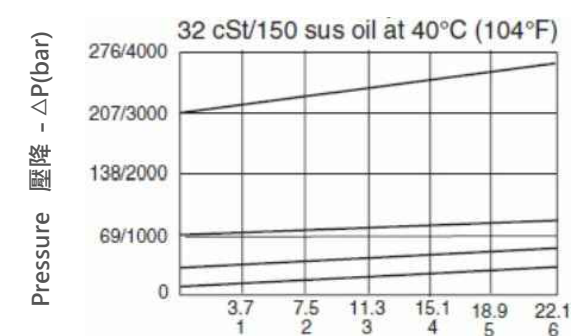

Flow / 流量 - Q (l/min)

(HRVA-10)

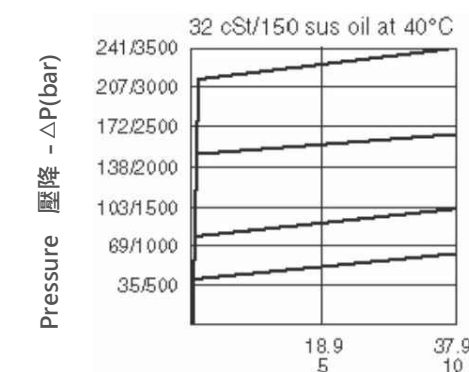


Flow / 流量 - Q (l/min)

Cavity-Tooling


成型孔



(HRVA-08)

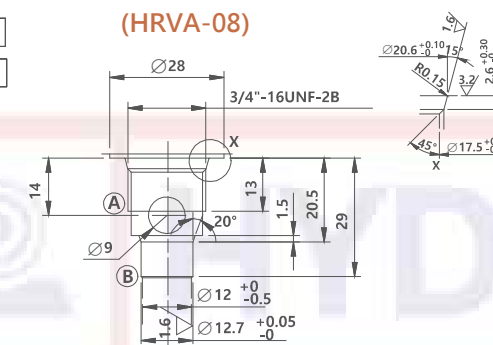

(HRVA-10)

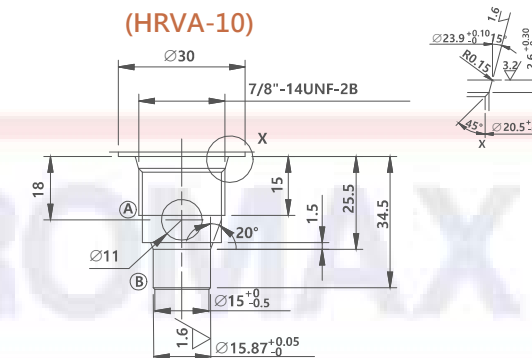


Dimension


外型尺寸圖

Millimeters / (inch)

(HRVA-08)

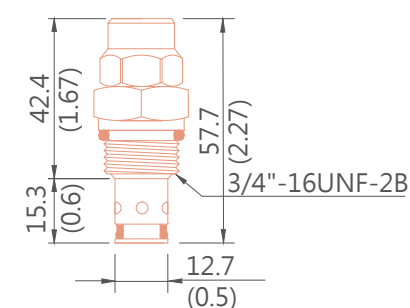

(HRVA-08-K)

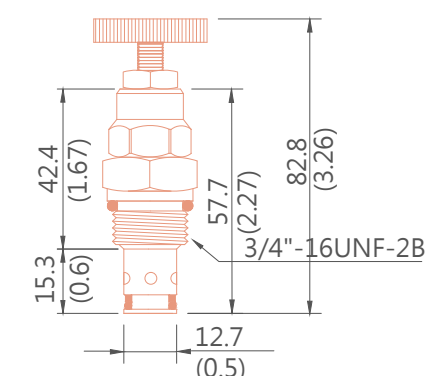

(HRVA-10)

