


KICK-DOWN, PILOT OPERATED RELIEF

自動跳合 平衡式溢流閥

RQ-B
Technical Data
技術參數


Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					L	K			
RQ2B	T10A	95	39.6	22.2	50.8	57.2	45/50	0.14	350
RQ3B	T3A	200	47.8	28.6	53.8	60.5	60/70	0.26	350
RQ6B	T16A	380	62	31.8	62	68.3	200/215	0.54	350
RQ8B	T18A	760	79.5	41.3	71.4	77.7	465/500	1.17	350


Ordering Code
型號說明
RQ **1** **2B** **2** **T10A** **3** **L** **4** **A** **5** **N** **6**

- Model Code 產品型號
- Capacity (l/min) 流量
2: 95 3: 200 6: 380 8: 760
- Cavity 閥孔型號
T10A T3A T16A T18A
- Control 控制方式
L: standard screw adjustment 標準螺絲調整
K: handknob with lock knob 調鈕調整
- Adjustment Range (bar) 調壓範圍
A: 7~210 B: 3.5~105 C: 10.5~420 N: 5~55
- Seal 油封材質
N: buna-N V: viton

Full Adjustment

5 turns

全調五圈

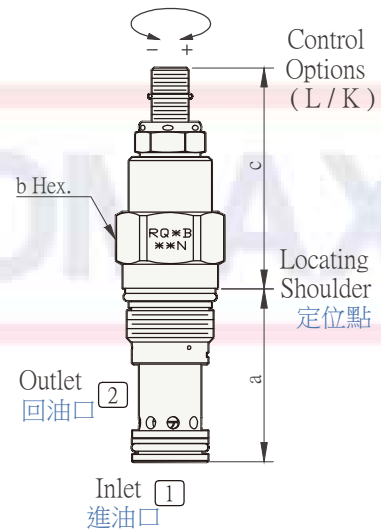
Performance Curves
性能曲線
